

# Fixing manual for PTJ012D、E、F、G、H、I KPTJ012D、KPTJ012E

Choose the switable cabinet accrding to the products( as the table)



| Table of item and cabinet |                                   |                                   |                                    |                                      |
|---------------------------|-----------------------------------|-----------------------------------|------------------------------------|--------------------------------------|
| Item No                   | "D"the depth of<br>inside cabinet | "W"the width of<br>inside cabinet | "H"the height of<br>inside cabinet | "B"the minimum<br>inside the cabinet |
| KPTJ012D                  | 480                               | 400                               | 1850~2200                          | 365                                  |
| KPTJ012D-300              | 480                               | 300                               | 1850~2200                          | 265                                  |
| KPTJ012D-450              | 480                               | 450                               | 1850~2200                          | 415                                  |
| KPTJ012D-500              | 480                               | 500                               | 1850~2200                          | 465                                  |
| PTJ012D                   | 480                               | 400                               | 1700~2000                          | 365                                  |
| PTJ012F                   | 480                               | 400                               | 1400~1700                          | 365                                  |
| PTJ012F-300               | 480                               | 300                               | 1400~1700                          | 265                                  |
| PTJ012F-500               | 480                               | 500                               | 1400~1700                          | 465                                  |
| PTJ012H                   | 480                               | 400                               | 1150~1350                          | 365                                  |
| PTJ012H-500               | 480                               | 500                               | 1150~1350                          | 465                                  |
| PTJ012H-550               | 480                               | 550                               | 1150~1350                          | 515                                  |
| KPTJ012E                  | 450                               | 300                               | 1850~2200                          | 265                                  |
| PTJ012E                   | 450                               | 300                               | 1700~2000                          | 265                                  |
| PTJ012G                   | 450                               | 300                               | 1400~1700                          | 265                                  |
| PTJ012I                   | 450                               | 300                               | 1150~1350                          | 265                                  |

## Listing of parts:

- A、top runner
- B、bottom runner
- C、main frame
- D、T-bar
- E、saddle-backed stabilizer
- F、pothook
- G、wire basket


## Assembly listing of screw:

- 1、ST4\*14 pan head wood screw 36PCS:  
12PCS use for fixing top runnet on the top board of the cabinet.  
8PCS use for fixing bottom runnet on the bottom board of cabinet.  
8PCS use for fixing T-bar to the door board.  
8PCS use the saddle-backed stabilizet.
- 2、6PCS M6\*15 use for connecting and adjusting discreteness of door board
- 3、2PCS M8\*20 use for adjusting on the door
- 4、2PCS M6\*10 use for adjusting the main frame.

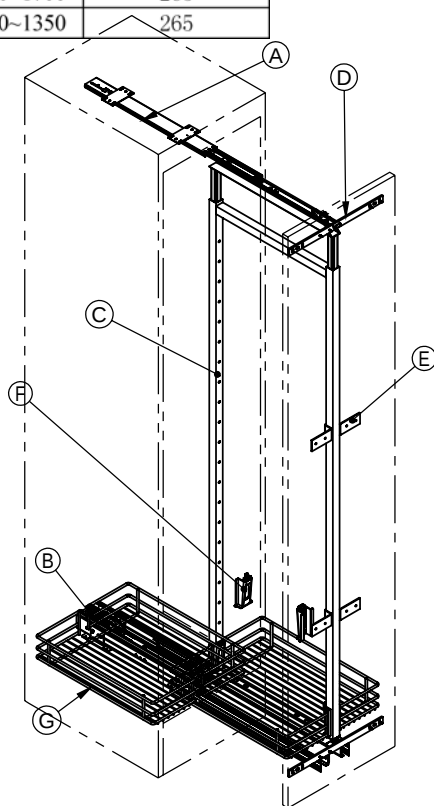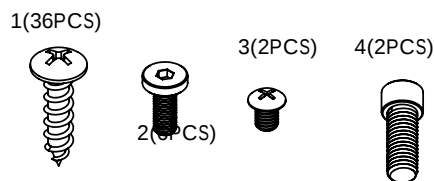


## Fixing step

1、Fix the bottom runner by using ST4\*14 pan head wood screw 8PCS to fix up.

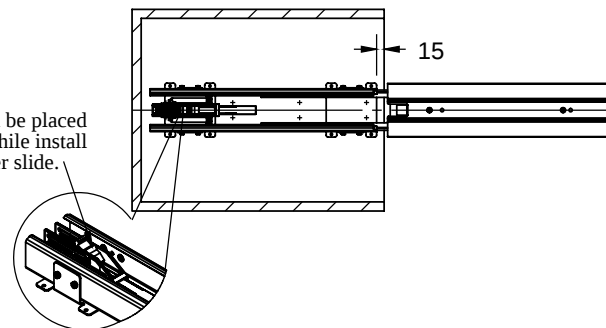

3、Fix the frame(c) to the bottom runner(B)

2、Fixing the top runner by using ST4\*14 pan head wood screw 12pcs to fix up

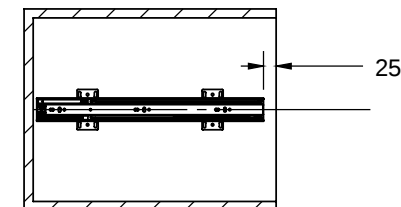

4、Fixing the frame(c) adjust the frame to the suitable height and fix it up by 2pcs M6\*10

